
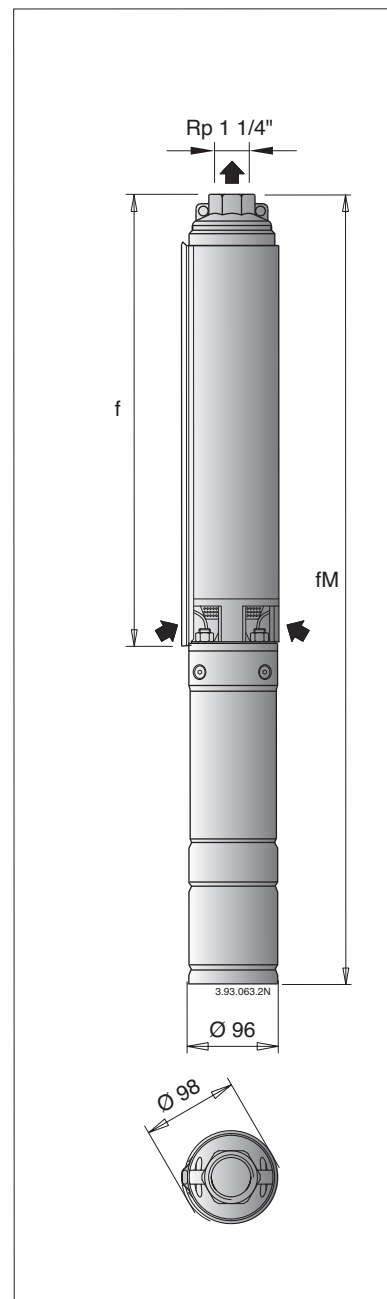


Curve caratteristiche e prestazioni $n \approx 2900$ 1/min, dimensioni e pesi

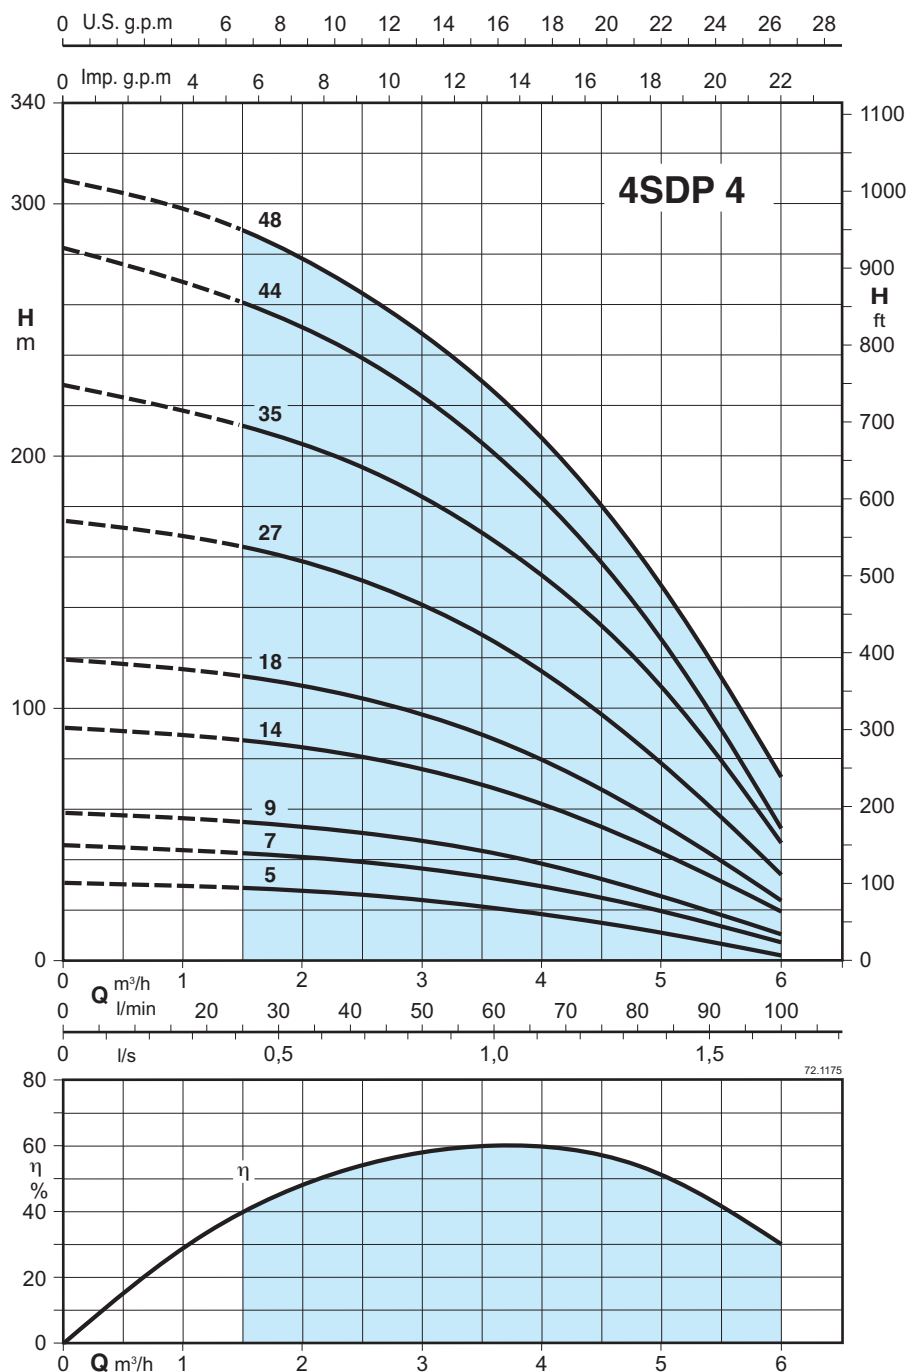

3~	400 V (380-415) 50 Hz A	1~	230V Condens. 450 Vc μF	P ₁ kW	P ₂ kW	HP	Q m³/h l/min	n $\approx$ 2900 1/min									
								0	1,5	1,8	2,1	2,4	3	3,6	4,2	4,8	6
								0	25	30	35	40	50	60	70	80	100
4SDP 4/5C	1,2	4SDPM 4/5C	3,2	16	0,71	0,37	0,5	33	29	28	27	26	24	21	18	13	3
4SDP 4/7C	1,5	4SDPM 4/7C	4	25	0,91	0,55	0,75	46	43	42	41	39	36	33	28	22	7
4SDP 4/9C	2,2	4SDPM 4/9C	5,6	30	1,24	0,75	1	59	55	54	52	51	47	43	37	28	10
4SDP 4/14C	2,8	4SDPM 4/14C	8	40	1,71	1,1	1,5	93	87	86	83	81	76	68	58	47	20
4SDP 4/18C	3,7	4SDPM 4/18C	10,8	60	2,33	1,5	2	120	113	111	108	105	98	88	75	60	25
4SDP 4/27C	5,5	4SDPM 4/27C	14,7	70	3,25	2,2	3	175	164	161	157	152	141	127	109	87	35
4SDP 4/35C	7,4					3	4	228	212	208	203	197	184	166	145	119	46
4SDP 4/44C	9,4					4	5,5	282	261	255	249	241	223	201	173	140	52
4SDP 4/48C	9,4					4	5,5	309	289	283	276	267	248	225	197	162	73

f	4SDP			4SDPM		
	mm	mm	kg	mm	mm	kg
257	584	10,4	584	10,3		
301	628	10,7	663	12,4		
344	691	12	706	12,7		
452	814	13,6	854	14,8		
538	940	15,5	985	17,1		
805	1207	18,9	1322	22,9		
972	1453	23,8				
1166	1712	28,5				
1291	1837	29,1				

P₁ Massima potenza assorbita

P₂ Potenza nominale motore

* Solo per versione monofase 230 V - 50 Hz (a richiesta)

H Prevalenza totale in m