



HTSW curva tecnica prolungata senza morsetto con tappo

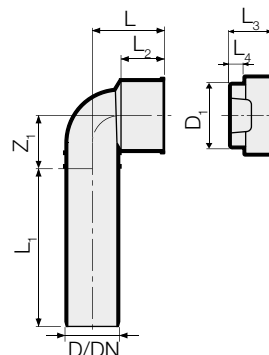

COD.	D/D ₁	DN	Z ₁	L	L ₁	L ₂	L ₃	L ₄	kg				HxLxP	CL	€/pz
VS0520102	32/46	30	36	50	124	28	30	10	0,052	20	160	960	970x800x1200	PP02	4,70
VS0520103	32/50	30	36	50	119	28	35	12	0,055	20	160	960	970x800x1200	PP02	4,70
VS0520104	40/46	40	36	50	124	28	30	10	0,060	20	160	960	970x800x1200	PP02	2,77
VS0520107	40/50	40	36	53	119	32	35	12	0,067	20	160	960	970x800x1200	PP02	2,77


HTS raccordo dritto, senza morsetto con tappo



COD.	D/D ₁	DN	L	L ₁	L ₂	L ₃	L ₄	kg				HxLxP	CL	€/pz
VS0522103	32/46	30	88	54	28	30	10	0,034	40	320	1920	970x800x1200	PP02	4,28
VS0522107	40/46	40	88	54	28	30	10	0,036	40	320	1920	970x800x1200	PP02	1,84
VS0522113	40/50	40	88	54	28	35	12	0,039	40	320	1280	850x800x1200	PP02	1,97
VS0522117	40/53,5	40	70	38	28	30	10	0,035	40	320	1280	850x800x1200	PP02	2,05
VS0522121	50/53,5	50	88	54	28	30	10	0,041	20	160	960	980x800x1200	PP02	2,21

Accessori

Morsetto in gomma



COD.	D ₁	D ₂	L	kg				HxLxP	CL	€/pz
VS0334003	46	24-32	22	0,026	100	800	8000	1130x800x1200	CC01	0,76
VS0334005	46	36-40	22	0,012	150	1200	7200	1060x800x1200	CC01	0,76
VS0523009	50	24-32	22	0,031	30	600	4200	935x800x1200	PP02	1,79
VS0523011	50	36-40	22	0,026	30	600	4200	935x800x1200	PP02	1,79
VS0523015	53,5	24-32	22	0,029	30	600	4200	935x800x1200	PP02	1,79
VS0523017	53,5	36-40	22	0,025	30	600	4200	935x800x1200	PP02	1,79
VS0523019	60	46-55	24	0,020	30	600	4200	935x800x1200	PP02	3,47